



# EasyPushbar Assembly Instructions

## Parts List


A	Pushbar
B	Clamps
C	Lock Screws
D	Metal L Bar
E	Clamp Bolt
G	Allen Wrench

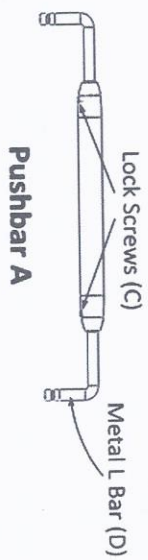

MADE IN CHINA

### Step 1


Attaching Handle Clamp (B) to Metal L Bar (D)

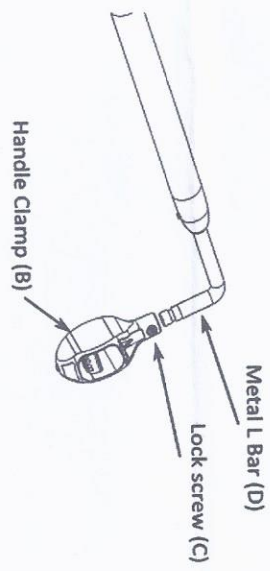

1. Insert the handle clamp (B) into the metal L bar (D) as shown in the diagram.
2. Push the bar as far into the handle clamp as possible.
3. Lock the assembly by tightening the lock-screw (C) using the allen wrench provided.
4. Repeat for the second handle clamp.

### Step 2

Attaching Pushbar (A) to wheelchair hand grips (F)

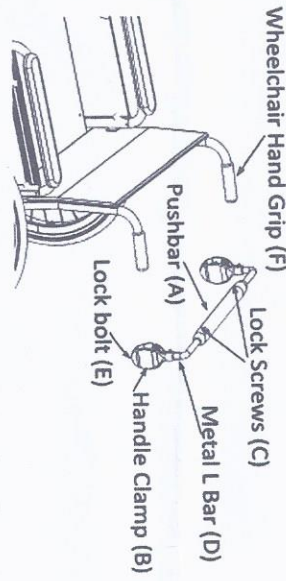

1. Slightly loosen the lock screws (C) on the pushbar (A) so that the metal L bar (D) slides easily in and out.
2. Attach one handle clamp (B) to one hand grip (F) of the wheelchair.
3. Adjust the width of the pushbar to fit the wheelchair by sliding the metal L bars (D) in and out of the pushbar (A).
4. Attach the other handle clamp (B) to the other wheelchair hand grip (F).
5. Tighten both handle clamps using the Clamp Screws (E) using the allen wrench provided.
6. Center the pushbar (A) and then lock in place by tightening the two lock screws (C) on the pushbar.